


HOTMELT Line selection tables

HOTMELT LINE HIGH TEMPERATURE CARTRIDGE HEATERS

D (mm)	L (mm)	W	V	NO.	
1/4"	1"	100	240	HT96275	
	2 3/4"	100	240	HT95594	
	1"	60	240	HT96276	
		65	120	HT96277	
	3/8"	1 1/4"	100	120	HT95567
150			240	HT95585	
1 3/8"		200	240	HT96278	
		210	240	HT96279	
		250	240	HT96280	
1 3/8"		100	240	HT95583	
1 1/2"		200	240	HT95566	
1 5/8"		100	240	HT96281	
1 7/8"		75	240	HT96282	
2"		200	240	HT96283	
1/2"	2 1/4"	250	240	HT96284	
	2 1/2"	150	240	HT96285	
	3 1/4"	210	240	HT96288	
		145	240	HT95578	
	4"	280	240	HT95588	
		210	240	HT95570	
		1 1/4"	105	240	HT95568
	1/2"	1 1/4"	150	240	HT95576
			150	120	HT95577
		2"	180	240	HT95575
200			240	HT96286	
5"	400	240	HT96287		

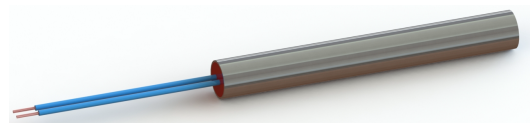

GENERAL TECHNICAL FEATURES

RANGE OF LOADINGS: W50 ÷ W2500 - **VOLTAGE** V230 - **TOLERANCE ON DIA.:** -0.02 / -0.07

TOLERANCE ON LENGTH: up to 100 mm +/-2 mm; above 100 mm +1/-3%

TOLERANCE ON WATTAGE: +5/-10%