




HEATERS FOR PELLET STOVES

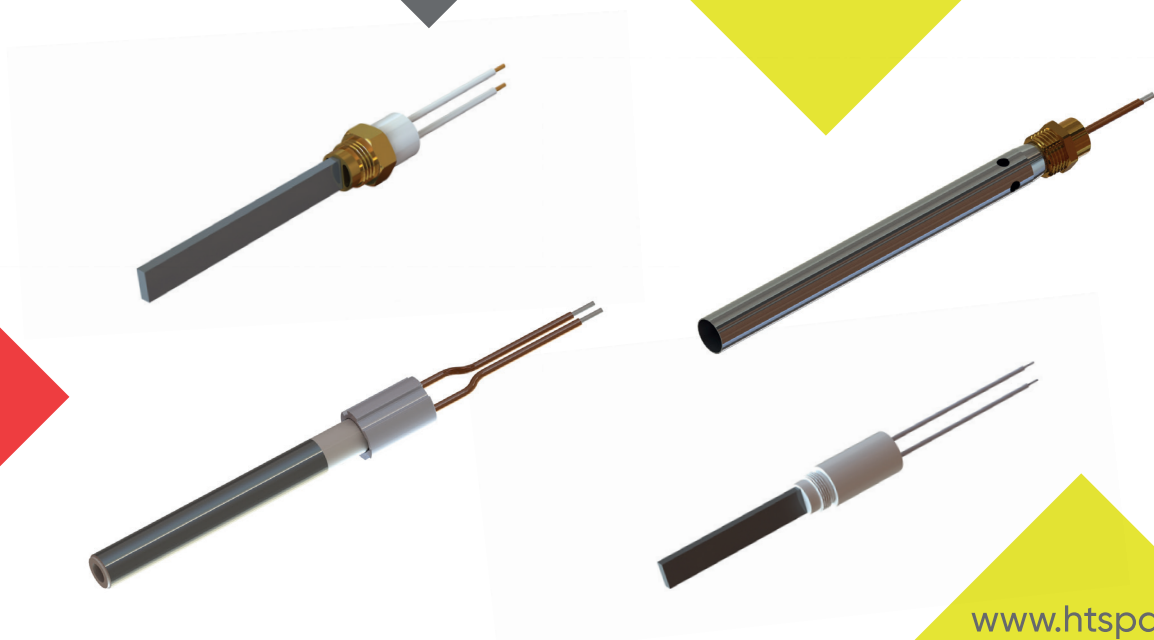


www.htspa.it

QUARTZ HEATERS


HT can supply you for wood chips and pellet stoves and burners also the black quartz igniter.

FEATURES:

- MAX Temperature of the element 1100°C
- Resistant to corrosion
- Heating up quickly




OPEN




CLOSE


CODE	DIMENSION	HEATER LENGTH	TOTAL HEATER LENGTH	LOADING WATT	CABLE LENGTH	VERSION
CM74662	11,4	80	114	330	350	CLOSE

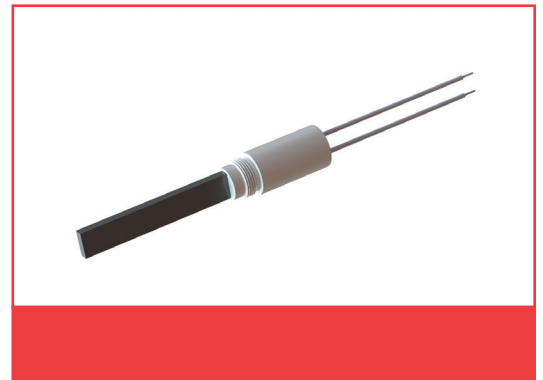


CODE	DIMENSION	HEATER LENGTH	TOTAL HEATER LENGTH	LOADING WATT	CABLE LENGTH	VERSION
CM74663	11,4	110	128	330	350	CLOSE

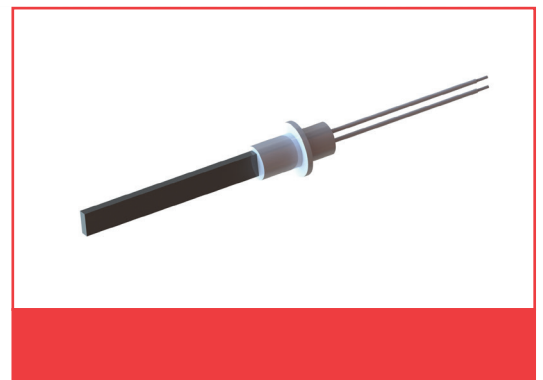

CODE	DIMENSION	HEATER LENGTH	TOTAL HEATER LENGTH	LOADING WATT	CABLE LENGTH	VERSION
CM74660	11,4	101	137	330	350	CLOSE
CM74661	11,4	101	137	330	350	OPEN

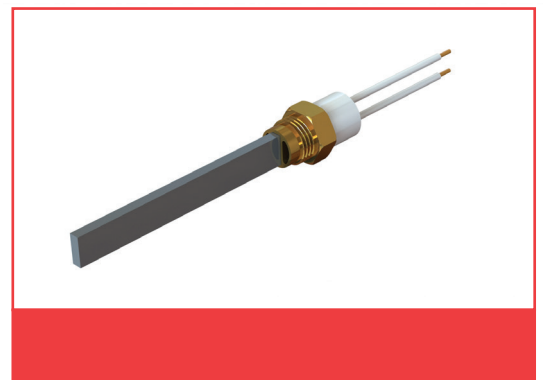

CODE	DIMENSION	HEATER LENGTH	TOTAL HEATER LENGTH	LOADING WATT	CABLE LENGTH	VERSION
CM74664	11,4	89	134	330	350	OPEN
CM74665	11,4	89	134	330	350	CLOSE

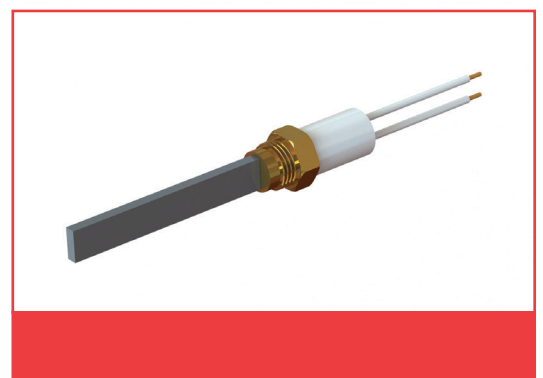

CARTRIDGE HEATERS

The Super Pellet line is thought to simplify the substitution of cartridge heaters for pellet stoves already installed. The cartridge heaters are supplied as follow:

- Packed in plastic bag containing 10 pcs;
- Standard cable length of 500 mm;
- The cable connections are standard terminals.

They are available in three versions: with Bush, with Flange, straight version.

Minimum order quantity: 50 pcs for each model. The super pellet cartridge heaters are suitable for many applications and models, **but they are not original spare parts**. Super Pellet cartridge heaters are available in stock.

CODE	DIAMETER	HEATER LENGTH	TOTAL HEATER LENGTH	LOADING WATT	CABLE LENGTH	THREADED CONNECTION
HT62647	9,9	130	140	270	500	3/8
HT62648	9,9	136	146	250	500	3/8
HT62649	9,9	138	148	300	500	3/8
HT62650	9,9	140	150	250	500	3/8
HT62651	9,9	140	150	280	500	3/8
HT62652	9,9	140	150	300	500	3/8
HT62653	9,9	143	153	250	500	3/8
HT62654	9,9	150	160	300	500	3/8
HT62655	9,9	150	160	280	500	3/8
HT62656	9,9	170	180	300	500	3/8
HT68668	9,9	195	205	350	500	3/8
HT62657	10	300	340	250	500	M14X1,5
HT67738	12,5	94	104	250	500	3/8
HT62659	12,5	153	163	330	500	3/8
HT62660	12,5	160	170	350	500	3/8
HT62663	12,5	160	170	350	500	1/2
HT62664	12,5	180	190	450	500	1/2
HT62665	12,5	180	190	350	500	1/2
HT62666	12,5	180	190	350	500	3/8
HT62682	12,5	194	204	420	500	3/8
HT63444	12,5	200	210	430	500	3/8



Type version with bush

CODE	DIAMETER	HEATER LENGTH	TOTAL HEATER LENGTH	LOADING WATT	CABLE LENGTH	FLANGE
HT62704	9,5	145	160	250	500	YES
HT62705	12,5	150	160	350	500	YES
HT62706	12,5	160	170	350	500	YES
HT63200	12,5	182	192	350	500	YES



Type version with flange

CODE	DIAMETER	HEATER LENGTH	TOTAL HEATER LENGTH	LOADING WATT	CABLE LENGTH
HT62683	9,5	188	188	250	500
HT62684	9,9	150	150	250	500
HT62685	9,9	155	155	300	500
HT62686	10	155	155	280	500
HT62687	10	155	155	300	500
HT62688	9,9	160	160	300	500
HT62700	10,2	155	155	300	500
HT62701	10	180	180	320	500
HT62702	12,5	150	150	250	500
HT62703	12,5	160	160	350	500
HT64686	12,7	187	187	400	500




Type straight version

HEATER MOUNTING TUBE/AIR MANIFOLD

Special kit. It is possible to supply some heaters as a complete assembly with air inlet manifold tube.

CODE	DIAMETER	HEATER LENGTH	TOTAL HEATER LENGTH	LOADING WATT	CABLE LENGTH	KIT WITH MOUNTING TUBE
HT62707	9,9	185	185	350	500	YES
HT62708	16	120	120	350	500	YES
HT63993	12,5	186	186	400	500	YES

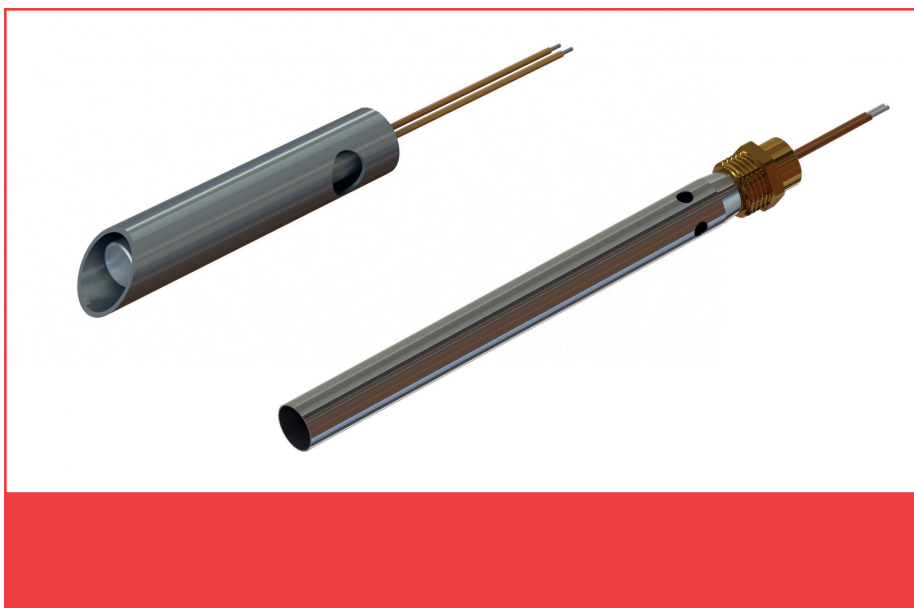


ON REQUEST



On request we can supply cartridge heaters with UL/CSA approval.



We develop also cartridge heaters in Incoloy with low voltage as for example 24V.



We develop also customized heaters according to our customers needs.

CERAMIC HEATERS

For very rapid ignition or when it is necessary to achieve higher temperature, HT offers ceramic heaters for biomass and pellet stoves.

FEATURES:

- Temperature of the element 1000°C in continuous operation or interchanging.
- Resistant to oxidation and corrosion.
- Simplified method of heat exchange by the passage of air both externally and within the air.




OPEN




CLOSE

CODE	DIMENSION	HEATER LENGTH	LOADING WATT	FEATURE
KH67229	11,55	89	330	OPEN
KH67230	11,55	89	280	OPEN
KH67053	11,55	89	230	OPEN
KH71756	11,55	89	200	OPEN
KH67235	11,55	89	330	CLOSE
KH67236	11,55	89	280	CLOSE
KH67237	11,55	89	230	CLOSE
KH71938	11,55	89	200	CLOSE

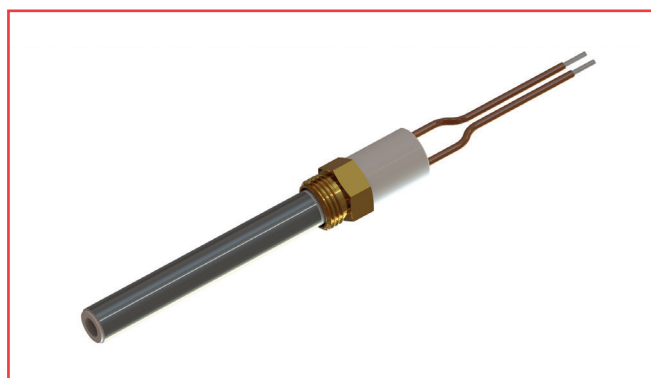


Type version with bush

CODE	DIMENSION	HEATER LENGTH	LOADING WATT	FEATURE
KH64938	11,55	94	330	OPEN
KH66603	11,55	94	280	OPEN
KH67231	11,55	94	230	OPEN
KH71755	11,55	94	200	OPEN
KH67232	11,55	94	330	CLOSE
KH67233	11,55	94	280	CLOSE
KH67234	11,55	94	230	CLOSE
KH71937	11,55	94	200	CLOSE

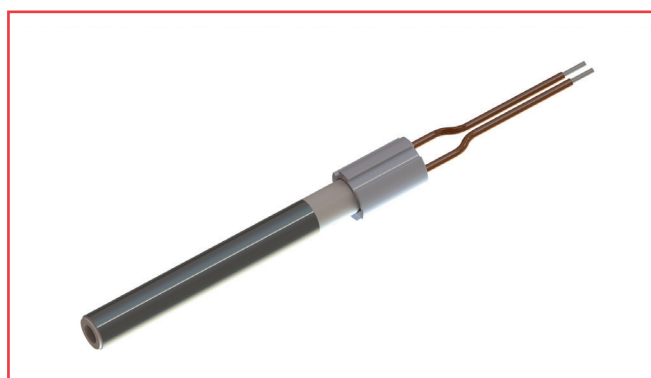

Type version without bush

CODE	DIMENSION	HEATER LENGTH	LOADING WATT	FEATURE
KH74736	11,55	96	330	CLOSE
KH74737	11,55	96	280	CLOSE
KH74738	11,55	96	230	CLOSE
KH74739	11,55	96	200	CLOSE

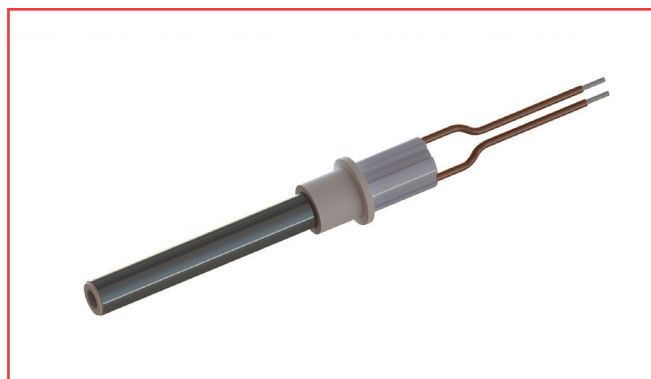

Type version with flange



HT Spa

Via Conegliano, 73/B - 31058 Susegana (TV) - Italy

DOMESTIC SALES - Tel. +39 0438 454294 - vendite@htspa.it

EXPORT SALES - Tel. +39 0438 454290 - sales@htspa.it

Fax +39 0438 62788

www.htspa.it

MVA13390

02.2020

HT Heizelemente Deutschland GmbH
Brinkeweg 18 - 33758 Schloss Holte-Stukenbrock
Tel: +49 5207 99 12 29 0 - Fax: +49 5207 99 12 29 19
info@ht-heizelemente.de
www.ht-heizelemente.de

HT SpA reserves the right to change at any time specification and other information included in this catalogue without notice.