


AIR BLOW HEATERS

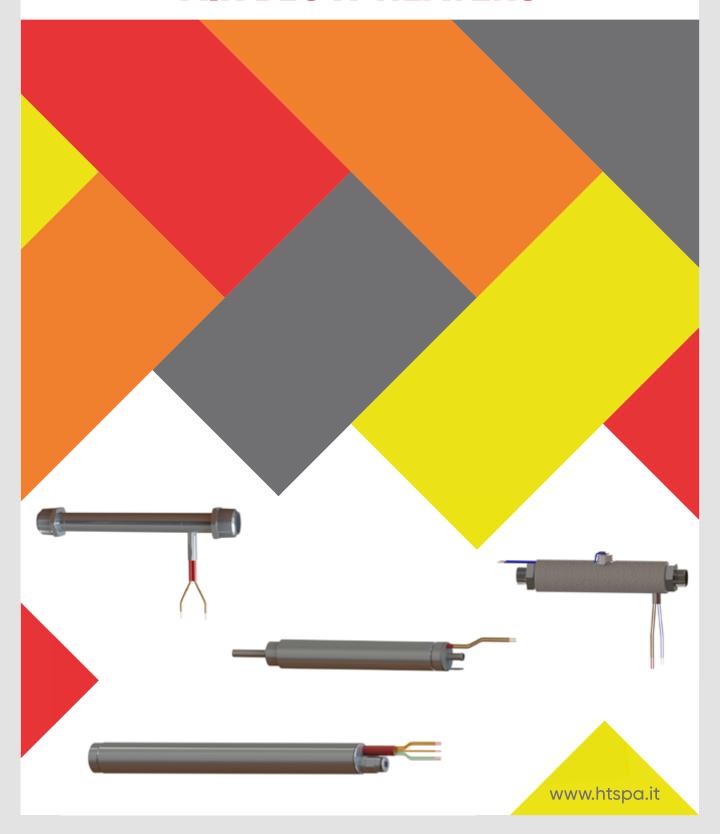

AIR BLOW HEATERS

HT proposes a wide range of heaters for quick air heating.

APPLICATIONS:

- Glue preheating
- Thermosealing
- Air process heaters
- Air dryer


ON REQUEST:



It is possible to complete the product with a thermocouple or thermoheater for controlling the air temperature or as security probe.



We develop also customized heaters according to our customers needs (with special high temperature leads abs inlet and outlet air connections according to specific requirements.)

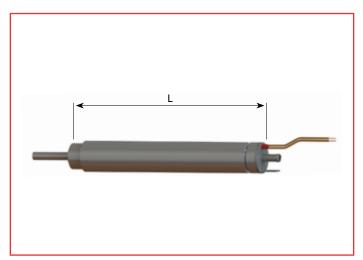

"PIPE" VERSION

Features:


Max work temperature: 450°C

CODE	L (mm)	WATT	VOLT
SP 76821	150	200	230
SP 76822	150	200	110

Other dimensions and types on request.

OPEN COIL

Air heater is an open coil of high temperature resistence wire: this means that the air passes directly over the wire, so the maximum heat transfer efficiency is achived. They can be in 2 types: "T" design and coibented version.

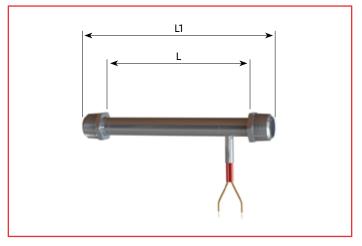


"T" DESIGN

The particular "T" design of the heater permits the protection of leads from high working temperatures.

CODE	L (mm)	L1 (mm)	WATT	VOLT
SP 76823	117	145	400	230
SP 76824	152	195	600	230
SP 76825	152	195	950	230
SP 76826	152	195	1200	230

Other dimensions and types on request.

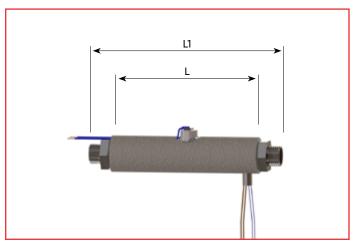


COIBENTED VERSION

Features:

Available also with sensor

CODE	L (mm)	L1 (mm)	WATT	VOLT
SP 76829	137	157	300	230

Other dimensions and types on request.

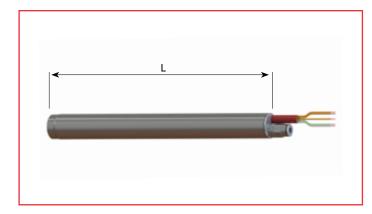

3 PASSES FLOW

Features:

• Max work temperature: 500°C

• Max Air pressure: 0.5 bar


• Max CFM : 50 I/minute

Benefit:

• Energy efficient

CODE	L (mm)	WATT	VOLT
SP 76830	243	800	380
SP 76831	244	1200	400
SP 76832	244	2400	400

Other dimensions and types on request.

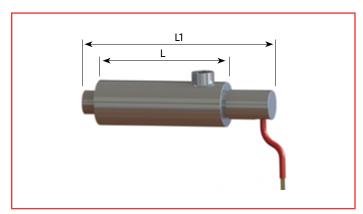

VAPORIZER VERSION

Features:

• Max work Temperature: 250°C

• Max work pressure: 10 bar

CODE	L (mm)	L1 (mm)	WATT	VOLT
SP 76833	224	330	1000	400
SP 76834	224	330	1000	230
SP 76835	534	640	3000	400
SP 76836	152	195	2000	400

Other dimensions and types on request.




As from 1978, year of its foundation, HT produces heating elements for industrial and domestic applications.













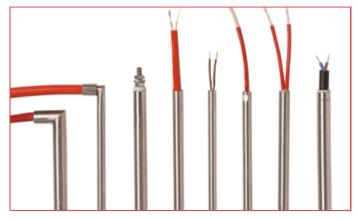

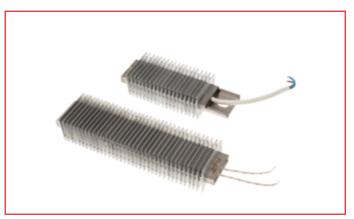

Many years have passed since 1978, but HT has never forgotten its mission: to offer innovative, targeted and efficient solutions!

HT suppliers customers from all over the world in the following industries:

















PROCESS

PELLET STOVES

TOWEL RAILS



HT Spa

Via Friuli, 79 - 31020 San Vendemiano (TV) - Italy DOMESTIC SALES - Tel. +39 0438 454294 - vendite@htspa.it EXPORT SALES - Tel. +39 0438 454290 - sales@htspa.it Fax +39 0438 62788

www.htspa.it

HT Heizelemente Deutschland GmbH Humboldtstraße 3, 60318 Frankfurt am Main Tel: +49 5207 99 12 29 0 - Fax: +49 5207 99 12 29 19 info@ht-heizelemente.de www.ht-heizelemente.de

HT SpA reserves the right to change at any time specification and other information included in this catalogue without notice.